


Buffered Multiple

1 -> 7

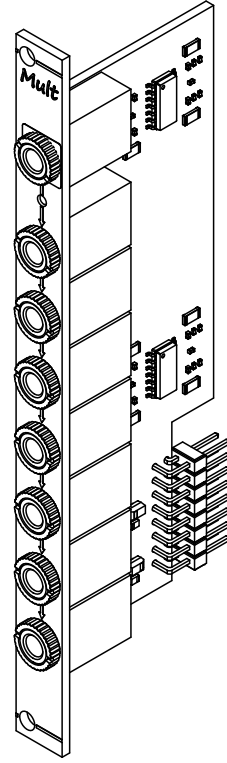


CATs EuroSynth

Dr. Michael Zülch


cats.synth@gmx.de

Technical Specifications

Width	2 HP
Maximum Depth	39mm w/o Connector
Current Draw	+12V: 20mA -12V: 15mA



This is a buffered 1-in-7 multiple. The signal applied to the input socket appears as a buffered signal at the seven output sockets. Each output has its own buffer, i.e. the seven output sockets are not simply connected to each other. Additionally, any positive inputs will be shown by a LED under the input jack. The display is roughly level sensitive, i.e. the brightness of the LED corresponds with the level of the input.

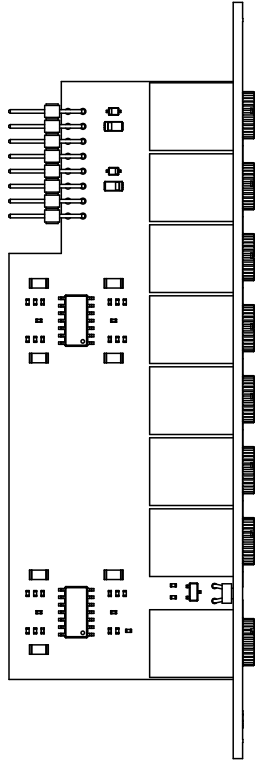

Installation

When installing or removing a module from your case always turn off the power to the case and disconnect the power cable. Failure to do so may result in serious injury or equipment damage.

Ensure the 10-pin connector on the power cable is connected correctly to the module before proceeding. The red stripe on the cable must line up with the -12V pins on the module's power connector. The pins are indicated with the label -12V, a white stripe next to the connector, the words "red", or some combination of those indicators.

