Slimline
4 Ch Mixer

Mix

1
A
B
C
D
2
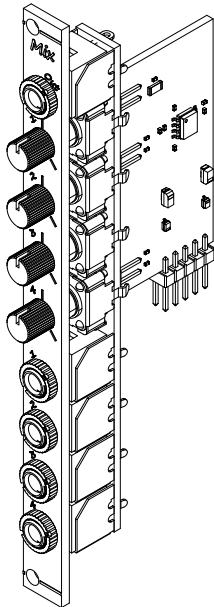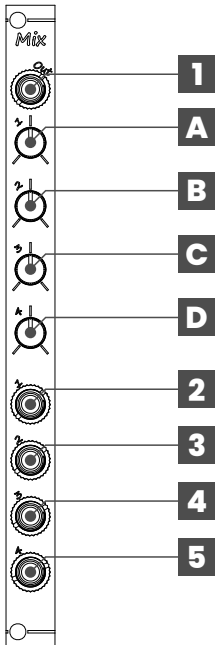3
4
5

INTRODUCTION

Thank you for purchasing the Slimline 4Ch Mixer, a highly versatile Eurorack-compatible synthesizer module. This compact module, spanning just 2HP in width, is designed to seamlessly integrate into your modular setup, offering a four-channel mixing solution for both audio and CV signals. Whether you're blending intricate soundscapes, combining control voltages for complex modulation, or simply managing signal flow within your rack, the Slimline 4Ch Mixer is engineered to deliver exceptional performance without occupying significant space. Its intuitive design ensures easy operation, allowing you to focus on creativity and sound exploration. We are thrilled to have you experience the flexibility and utility it brings to your musical endeavors.

1	Mixer Output	**A**	Chanel 1 Attenuator
2	Chanel 1 Input	**B**	Chanel 2 Attenuator
3	Chanel 2 Input	**C**	Chanel 3 Attenuator
4	Chanel 3 Input	**D**	Chanel 4 Attenuator
5	Chanel 4 Input		

SPECIFICATIONS

Dimensions	Standard	Eurorack 3U
	Width	2HP - 9.8mm
	Depth	42mm
Current Draw	+12 Volt	up to 40mA
	-12 Volt	up to 40mA
	+5 Volt	not connected
Input Signals	Maximum	+/- 10 Volt
Output Signals	Maximum	+/- 10 Volt
Impedance	Input	100 kΩ
	Output	10 kΩ
Materials	PCB	FR4 RoHS
	Front	Aluminium 1.6mm

Module designed and assembled in Germany

INSTALLATION

When installing or removing a module from your case always turn off the power to the case and disconnect the power cable. Failure to do so may result in serious injury or equipment damage.Ensure the 10-pin connector on the power cable is connected correctly to the module before proceeding. The red stripe on the cable must line up with the -12V pins on the module's power connector. The pins are indicated with the label -12V, a white stripe next to the connector, the words "red", or some combination of those indicators.
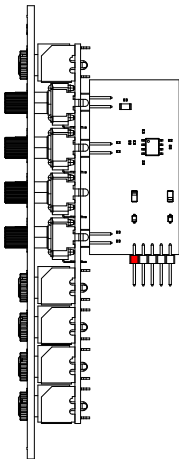
CatSynth Dr. Zülch
Beethovenstr. 17
76689 Karlsdorf
GERMANY

Phone   +49 7251 3227530
Email   info@catsynth.de
Web   www.catsynth.de