

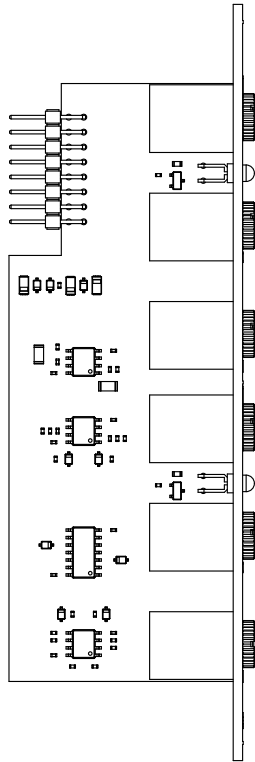




CATs EuroSynth

Dr. Michael Zülch
cats.synth@gmx.de

Voltage Controlled Switch

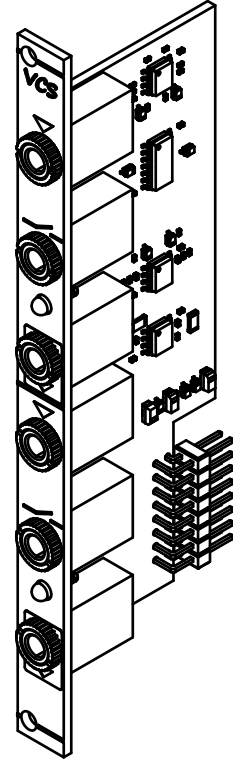


Installation

When installing or removing a module from your case always turn off the power to the case and disconnect the power cable. Failure to do so may result in serious injury or equipment damage.

Ensure the 10-pin connector on the power cable is connected correctly to the module before proceeding. The red stripe on the cable must line up with the -12V pins on the module's power connector. The pins are indicated with the label -12V, a white stripe next to the connector, the words "red", or some combination of those indicators.

Width	2 HP
Maximum Depth	39mm w/o Connector
Current Draw	+12V: 40mA -12V: 10mA


Technical Specifications

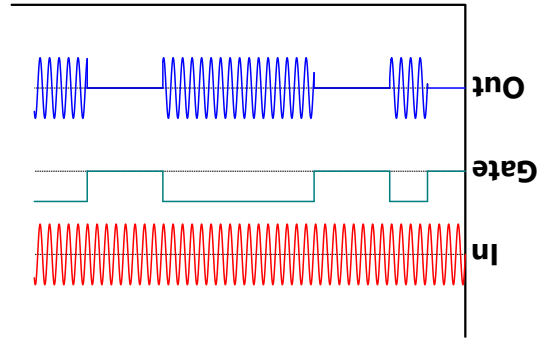

The module provides two completely independent voltage controlled switches. The switching is activated with a control voltage at a switching threshold of about 120mV and its status is indicated by LED.

The switches are unidirectional and are routing only from In to Out.

The switches accept signals in a wide range +/-10V are able to switch audio grade signals but are also suitable for gates, triggers, and control voltages.

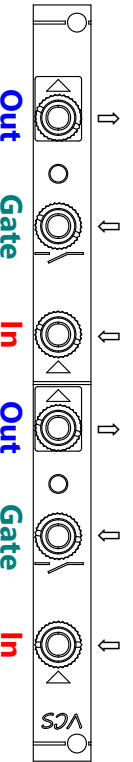

Function